INTERNSHIP REPORT
ON

"ROAD CONSTRUCTION AND UPGRADATION"

Submitted to-

MADHAV INSTITUTE OF TECHNOLOGY AND SCIENCE GWALIOR
(A govt. Aided Autonomous Institute under RGPV, Bhopal (M.P) Established in 1957)

IN PARTIAL FULFILLMENT FOR REQUIREMENT FOR THE AWARD OF THE DEGREE OF

BACHELOR of TECHNOLOGY
In
CIVIL ENGINEERING

2018-2022

Submitted By–

ARYAN KHAN– (0901CE181027)

FACULTY MENTOR-

Dr Hemant shrivatava
Assistant Professor
Department of Civil Engineering, MITS, Gwalior

INDUSTRY MENTOR-

Er Ajay Tomar
Assistant Manager
MPRRDA, Morena

Scanned with CamScanner

OFFICE OF THE GENERAL MANAGER
Madhya Pradesh Rural Road Development Authority
Project Implementation Unit Morena (M.P.)

Office Address – Quarter No. 9-10, New Commissonery Colony, A.B. Road Morena (M.P.)
Email – gmpiumorena@gmail.com Phone No. 07532 - 231628

Red. No. 837 Dated 24-5-22

CERTIFICATE

This is to certify that **Mr. Aryan Khan** S/o **Shri Aslam Khan** **(Roll No. 0901CE181027)** student of Madhav Institute Of Technology and Science, Gwalior has successfully completed internship training on road construction & upgradation sanctioned in Pradhan Mantri Gram Sadak Yojana in M.P. Rural Road Development Authority, Project Implementation Unit Morena from **14.01.2022** to **20.05.2022**

In His internship He learnt preparation of DPR & all activities involved in road construction such as construction of embankment, sub grade, sub base, base course & Bituminous work & all field & lab test require to maintain quality work.

We wish him all success in his life.

31017
24/5/2022

General Manager
MPRRDA, PIU Morena

Scanned with CamScanner

RECOMMENDATION

It is here by recommended that the internship report entitled—Road construction which is being submitted by Aryan khan completed under the guidance of Dr. Hemant shrivastava may be accepted in the partial fulfillment of the award of the degree of Bachelor of Engineering in CivilEngineering.

Guidedby

HEAD
Civil Engg. Deptt.
M.I.T.S. Gwalior

30/5/2022

Prof.andHead
CivilEngineeringDepartment
MITS,Gwalior

Dr. Hemant Shrivastava
Civil EngineeringDepartment
MITS,Gwalior

Scanned with CamScanner

ACKNOWLEDGEMENT

When it comes to properly acknowledging someone's support and assistance, it may be a challenging undertaking, chiefly when the support offered is so wholehearted and unwavering.


I am eternally grateful to my renowned guide, **Dr. Hemant Shrivastava**, Assistant Professor of Civil Engineering Department, MITS Gwalior.

Also, I would like to thank Head of Civil Engineering Department, MITS Gwalior, and all other academics and staff members of MITS Gwalior's Civil Engineering Department for their unwavering support throughout the project.

I am really grateful to **Dr. R. K. Pandit**, Director of MITS Gwalior, for establishing an outstanding institutional environment and for giving all facilities and assistance in the preparation of my dissertation. I also acknowledge with gratitude to our supporting **Mr. VIKRAM** for providing the facilities needed for the accomplishment of this project.

I take great pleasure for my institute Rural Road development authority, **Morena (M.P)** for providing the opportunities.

The environment of company has been valuable experience for me. It has provided an opportunity to learn at our own pace in discipline of interest. I would like to thank all those who helped me during different stages of completion of this project.



ARYAN KHAN
(0901CE181027)
DEPARTMENT OF CIVIL ENGINEERING
MITS GWALIOR (M.P.)

Scanned with CamScanner

ABSTRACT—

Road construction are exceedingly expensive, and they are greatly influenced by unknowns such as weather, soil type, and other site and environmental conditions. These uncertainties have an influence on the accuracy of resource productivity predictions and the development of dependable schedules for earthwork activities. Current simulation and planning methods and tools not only lack the capability to cope with such uncertainties, but also the integration and intelligence to simulate various strategies - a model must be developed every time a new scenario is required. As a consequence, resource allocation decisions are made only on the basis of the planner's experience, and project plans are not the product of a comparison of many allocation methodologies.

Scanned with CamScanner

ABSTRACT in Hindi—

सड़क निर्माण परियोजनाएं महंगी हैं और मौसम, मिट्टी के प्रकार और अन्य साइट और पर्यावरणीय कारकों जैसे कारकों से संबंधित अनिश्चितताओं से अत्यधिक प्रभावित हैं। ये अनिश्चितताएं संसाधन उत्पादकता की भविष्यवाणी की सटीकता और मिट्टी के काम के संचालन के लिए विश्वसनीय कार्यक्रम विकसित करने पर प्रभाव डालती हैं। वर्तमान अनुकरण और नियोजन दृष्टिकोणों और उपकरणों में न केवल ऐसी अनिश्चितताओं से निपटने की क्षमता का अभाव है, बल्कि उनमें कई का अनुकरण करने के लिए एकीकरण और बुद्धिमत्ता का भी अभाव है।

Scanned with CamScanner

List of abbreviation

PI..... Plasticity index

Ppm..... Parts per million

PS..... Product Standard

Sec..... Section

SF..... Square Feet

SQ..... Staked quantities

STA..... Station

STA YD..... Station Yard

SY..... Square Yard

t..... Ton (1,000 kg)

t..... km Ton kilometer

T .....Temperature

Th..... Thickness

TM..... Ton mile

TV .....Target value

USL..... Upper specification limit

Vert..... Vertical

VMA..... Voids in Mineral Aggregate

VOC .....Volatile organic compound

Yd..... Yard

W..... Width

Scanned with CamScanner

CONTENT

S NO.	TOPIC	PG NO.
1.	Introduction	9
2.	RRDA/PMGSY	10-11
3.	Road cross section and layer	13-14
4.	Geometric standards	15-16
5.	DPR front page(abroad to ambaah)	17
6.	Earthwork	18
7.	Maintenance check	19
8.	Several tests	22-26
9.	Results	23
10.	Analysis of rate	27
11.	. Conclusion	28
12.	Reference	29

Scanned with CamScanner

INTRODUCTION--

Rural roads plays fundamental role inside the growth in non-urban regions and villages to get right of entry to to economic and social infrastructures and service are the sine qua non of rural growth. In an oblique manner, rural roads affect the system of increase through adjustments within the socio-monetary attitudes of humans by way of facilitating the dissemination of expertise and reduction of inequalities leading to proper excellent of life. Rural roads are very necessary:

- To sell and maintain agricultural boom
- to enhance simple health and hygiene
- To offer get right of entry to to colleges and other educational opportunities
- To provide get admission to to financial opportunities
- To create employment opportunities
- To enhance democratic approaches and convey human beings into country wide mainstream
- To decorate nearby talents
- To lower vulnerability and poverty
- to behave as an infrastructure multiplier Rural Connectivity is perceived as one of the main issue in increasing the agricultural output and incomes potential of the rural population. enhancing rural connectivity will even cause marked development inside the exceptional of existence, by means of better educational facilities, advanced health offerings, stepped forward attendance of teachers in addition to college students and so on. Accessibility also ends in improvement inside the governance and provision of many other utility and emergency carrier.

Scanned with CamScanner

WHAT IS RRDA?

The PMGSY's primary and initial goal is to provide connectivity to qualifying disconnected Habitations in rural regions via all-weather roadway (complete with requisite.

• all of the nonconnected Habitations with a population of one thousand folks and above are blanketed inside the 1st level.

• all the Unconnected Habitations with a populace of 500 folks and above are blanketed in subsequent level. inside the admire of

. Priority must be given to through Routes of the rural centre community, which convey more tourists, during upgrade construction

Prime concern

I All nonconnected habitat with a population of one thousand or more in the Tribal proximity

II All nonconnected habitats with a population of five hunderd or more in the Tribal viciniy

III Improvements to the road in order to lessen the number of people.

Scanned with CamScanner

1. The Pradhan Mantri Gram Sadak Yojana's (PMGSY) ethos and principal goal is to give best all-weather street connection to disconnected Habitations. Even if the current state of the road is not in good shape, a residence that formerly provided climate connectivity would be non-eligible.

2. The program's unit is now a Habitat, not a sales.

3. An non connected habitats are one of different lengths that is located at a distance of no more than 500 metres (1.5 kilometres in the case of hills) from the all-climate avenue or a linked habitat.

4. The population, as recorded in the Census of 2001, will be used to calculate the Habitation's population size. For the purpose of determining the population length, the people of Habitations under the radius of five hundred metre (1.55 kilometres in the case of Hills) can be grouped together. Within the Hills and Mountainous Regions, the cluster approach might offer connectivity to a higher number of Habitations.

5. A centre community is the bare minimum of roadways required to provide easy access to critical social and financial service.

6 . the intermediate community, which is made up of connected and through Routes. Through routes are those that take visitors from numerous link road or a large chains of Habitation and transport them too advertising centre instantly and via better class highways, such as District Roads or national or countrywide dual carriageways.

Scanned with CamScanner



Scanned with CamScanner

ROAD CROSS SECTION—


OGPC— Open graded premix carpeting

BM—Bituminus Maccadam

W.M.M—Wet mix maccadam

G.S.B—Granular subbase

S.G—Subgrade

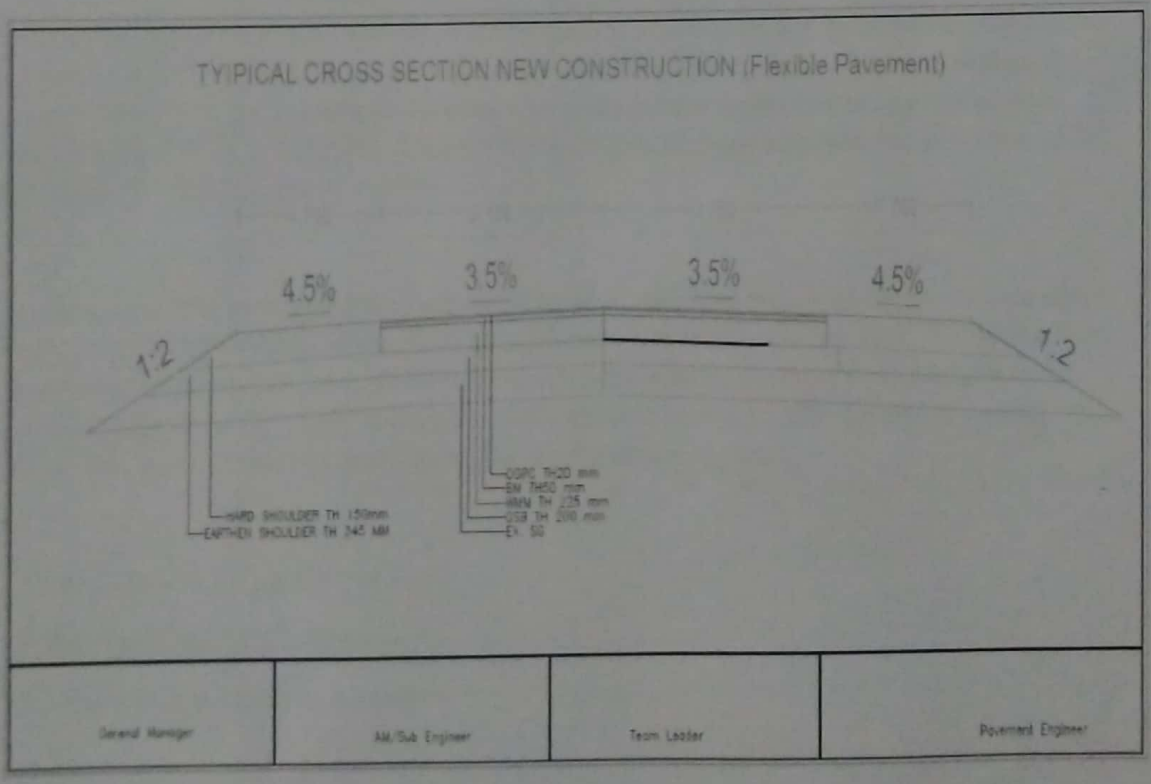

Scanned with CamScanner

Layers of road—

Embankment--- Earth work includes the construction of embankments and the teaching of subgrade. Soil survey and identification of borrow region, embankment and subgrade production are the main construction sports. Rolling the earth / dirt in extremely thin layers can be used to construct the embankment.

Subgrade—The pinnacle 30 cm of the cutting or embankment at the formation level shall be considered subgrade in Rural Roads. To make use of the subgrade's inherent electricity and avoid permanent deformation owing to extra compaction by site visitors, the subgrade must be compacted.

Sub-base(Granular)-- Sub-a base(Granular)—It's layer of chosen fabric laid on the subgrade and compacted to one hundred percent of the cloth's maximum dry density as established by IS:2720 (part 7). Typically, it consists of locally available, extremely low-power, lower-cost cloth. The major function of the sub-base is to spread the stresses exerted by site visitors across a larger area of the subgrade and to ensure that no subgrade material interferes with the bottom direction and vice versa.

Base course-- the base path materials ought to be of excellent first-class for you to face up to high stress concentrations which develop right away below the wearing floor. due to the fact bituminous floor consist most effective of a non thick wearingcourse, the above sirface of the bottom should be sufficiently clean and actual to profile to offer an amazing using floor. The special classes of base path that is very common uses:

1) Water bound Macdadam (W.B.M)

2) wet blend Maccadam (WMM) 3)

Crusher Run Macadam Base (CRMB

Scanned with CamScanner

Detailed project report—

Name of road—AB Road to Ambaah Road

GOVERNMENT OF M.P.

PRADHAN MANTRI GRAM SADAK YOJANA

Madhya Pradesh Rural Road Department

DETAILED PROJECT REPORT

FOR RURAL ROADS CONNECTIVITY SCHEME

UNDER

PRADHAN MANTRI GRAM SADAK YOJANA - III

YEAR 2019-2020



DISTRICT - MORENA | BLOCK - MORENA

NAME OF ROAD -AB ROAD TO AMBAH ROAD VIA MRIGPURA PALPURA GANJRAMPUR

PACKAGE - MP- | ROAD NO - T-05

Total Length :- BT-22.44 + CC-2.46	24.900		Kms	Avg. Cost /K.M
Cost of Flexible Pavement (Rs.)	1279.71		Lacs	57.03
Cost of Rigid Pavement (Rs.)	230.87		Lacs	93.85
Total Pavement Cost (Rs.)	1510.58		Lacs	60.67
No. of CD	9.00		Lacs	-
Cost of CDs (Rs.)	34.99		Lacs	5.00
Total Cost of Road(Rs.)	1545.57		Lacs	62.07
Cost of Social Economil	0.00		Lacs	0.00
Exceed cost of DPR Preparation	3.81		Lacs	0.15
Utility Shifting Service(Rs.)	6.30		Lacs	0.25
Road Inaugration Cost (Rs.)	0.05		Lacs	0.00
ATCC Cost (Rs.)	0.29		Lacs	0.01
Total Cost (GOI+State)(Rs.)	1556.02		Lacs	62.49
Total Cost (GOI+State)(Rs.) i/c @12%	1742.74		Lacs	69.99
Maintenance Cost (Rs. Lacs)	114.56		Lacs	4.60
Maintenance Cost (Rs. Lacs)/c @12%	128.31		Lacs	0.10
Total Cost Incl. Maintenance (Rs. Lacs)	1871.05		Lacs	75.14
Renewal cost after 5 years maintenance	1556.02		21.16	Lacs per Km.

M.P.R.R.D.A. Morena District - Morena (M.P.)

CONSULTANT

Engineering Consultancy Services

SF, P.C. Enclave, Infront of Silver Oak Hotel,City Centre, Gwalior (M.P.)


E-mail: [illegible] Ph. 0751 - [illegible]

Scanned with CamScanner


Earthwork—


it's far one of the foremost work worried in street production. it's miles about the removal of topsoil, in conjunction with any flowers, before scraping and the grading the region to the completed 'formation level'. this is achieved using a tractor shovel, grader and bulldozer. the soil is referred to as because the 'subgrade'. it's miles very necassary that the energy of the subgrade is tested previous to earthwork starting.

maximum of the earthwork ise fasshioned through reduce-and-fill, and the sort 'fill' fabric ought to be considered, not best in the terms of its physical houses, however on the situation wherein it's far for use, and the techniques of compaction.

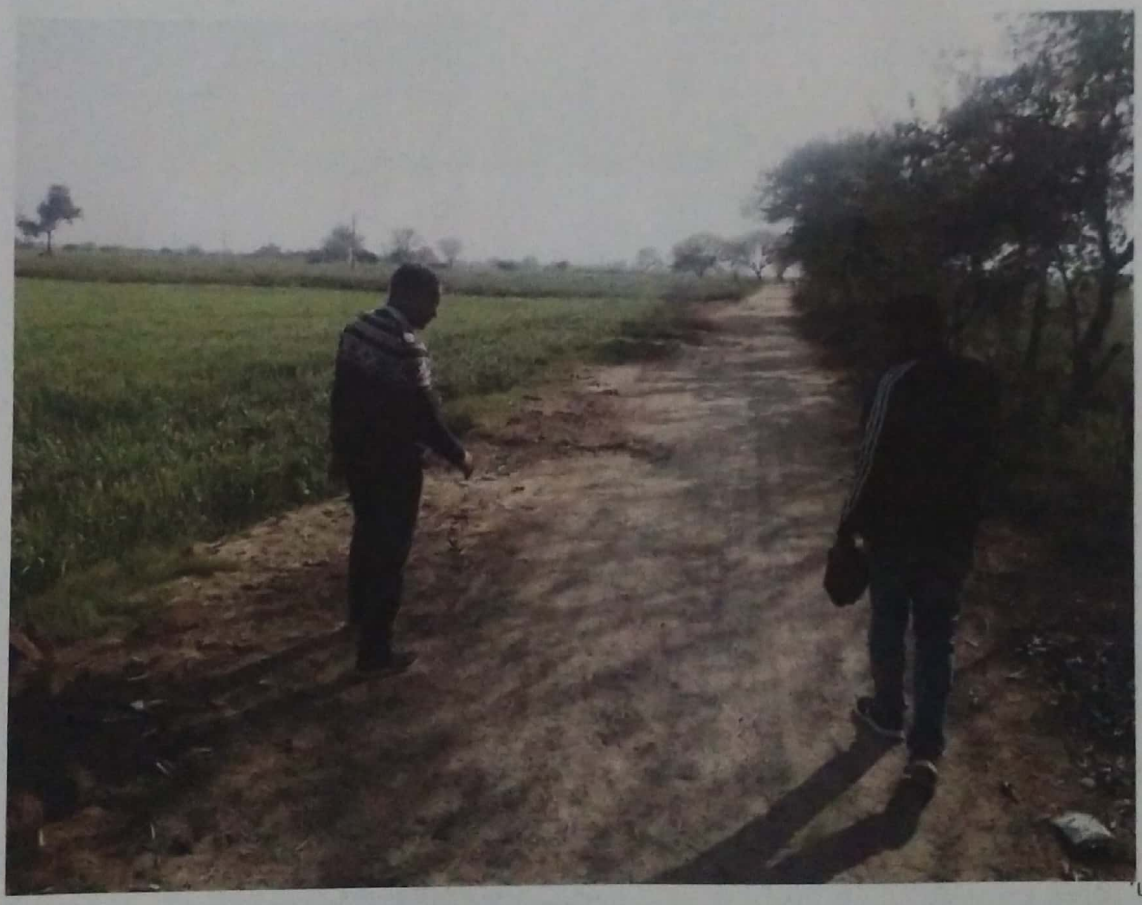

Scanned with CamScanner

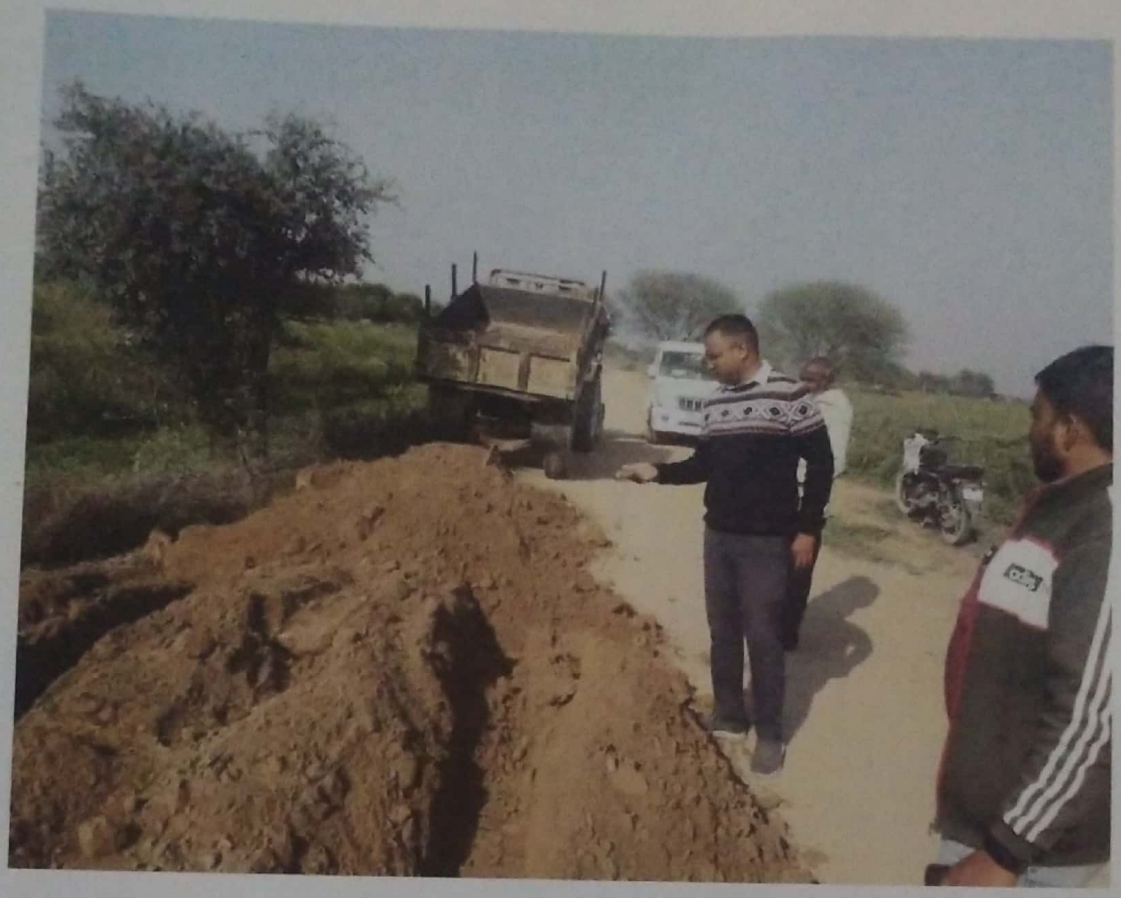

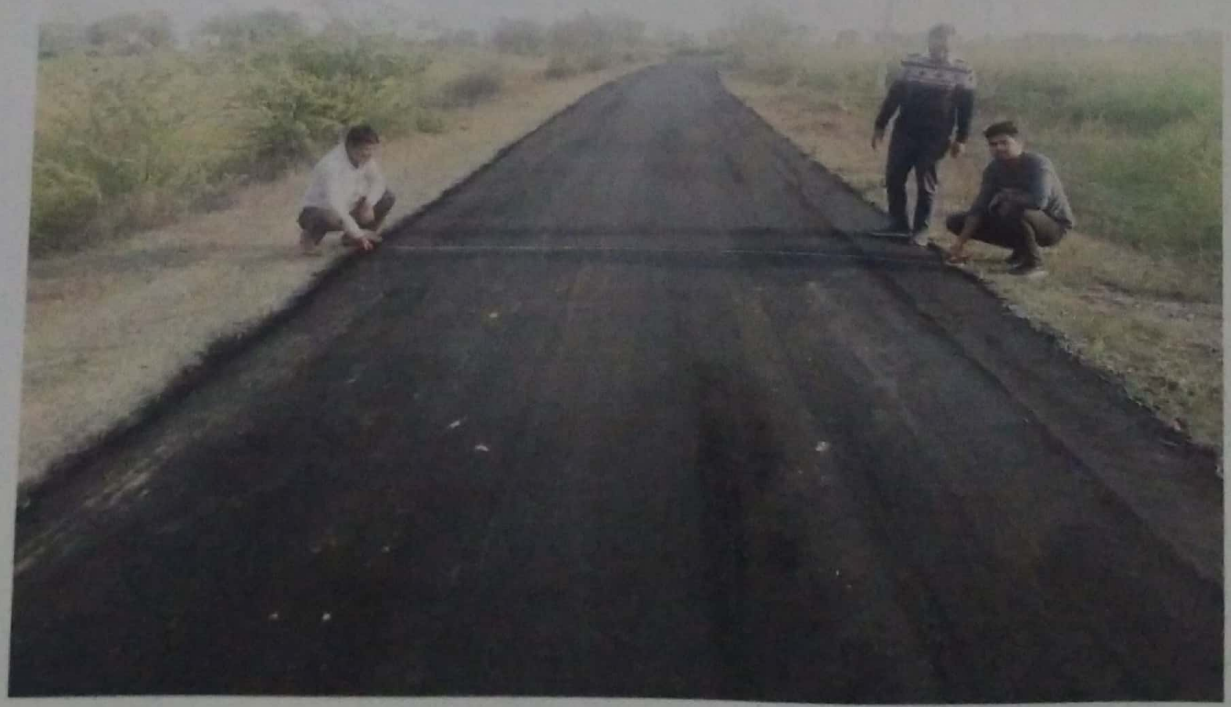

Scanned with CamScanner

Maintenance check—

Width of Road— **165 cm**

Thickness— 20mm



Scanned with CamScanner

sq.m.





Scanned with CamScanner

FIELD DENSITY TEST BY SAND REPLACEMENT METHOD—

In the production topic, a field density test of soil is performed to determine whether or not the necessary compaction has been completed. For this reason, the Sand Substitute Method is commonly used.

The Sand Cone method is another name for the sand replenishment technique.


A sand pouring cylinder with a pouring cone at its base is one of the devices used in the topic density investigation.

Between the cylinder and the cone, there might be a shutter. The cylinder is calibrated first to recognise the unit of sand weight.

The sand used must be homogeneous, dry, and smooth, passing through a 1.0 mm filter and remaining on a 600-micron screen for accurate results



Scanned with CamScanner

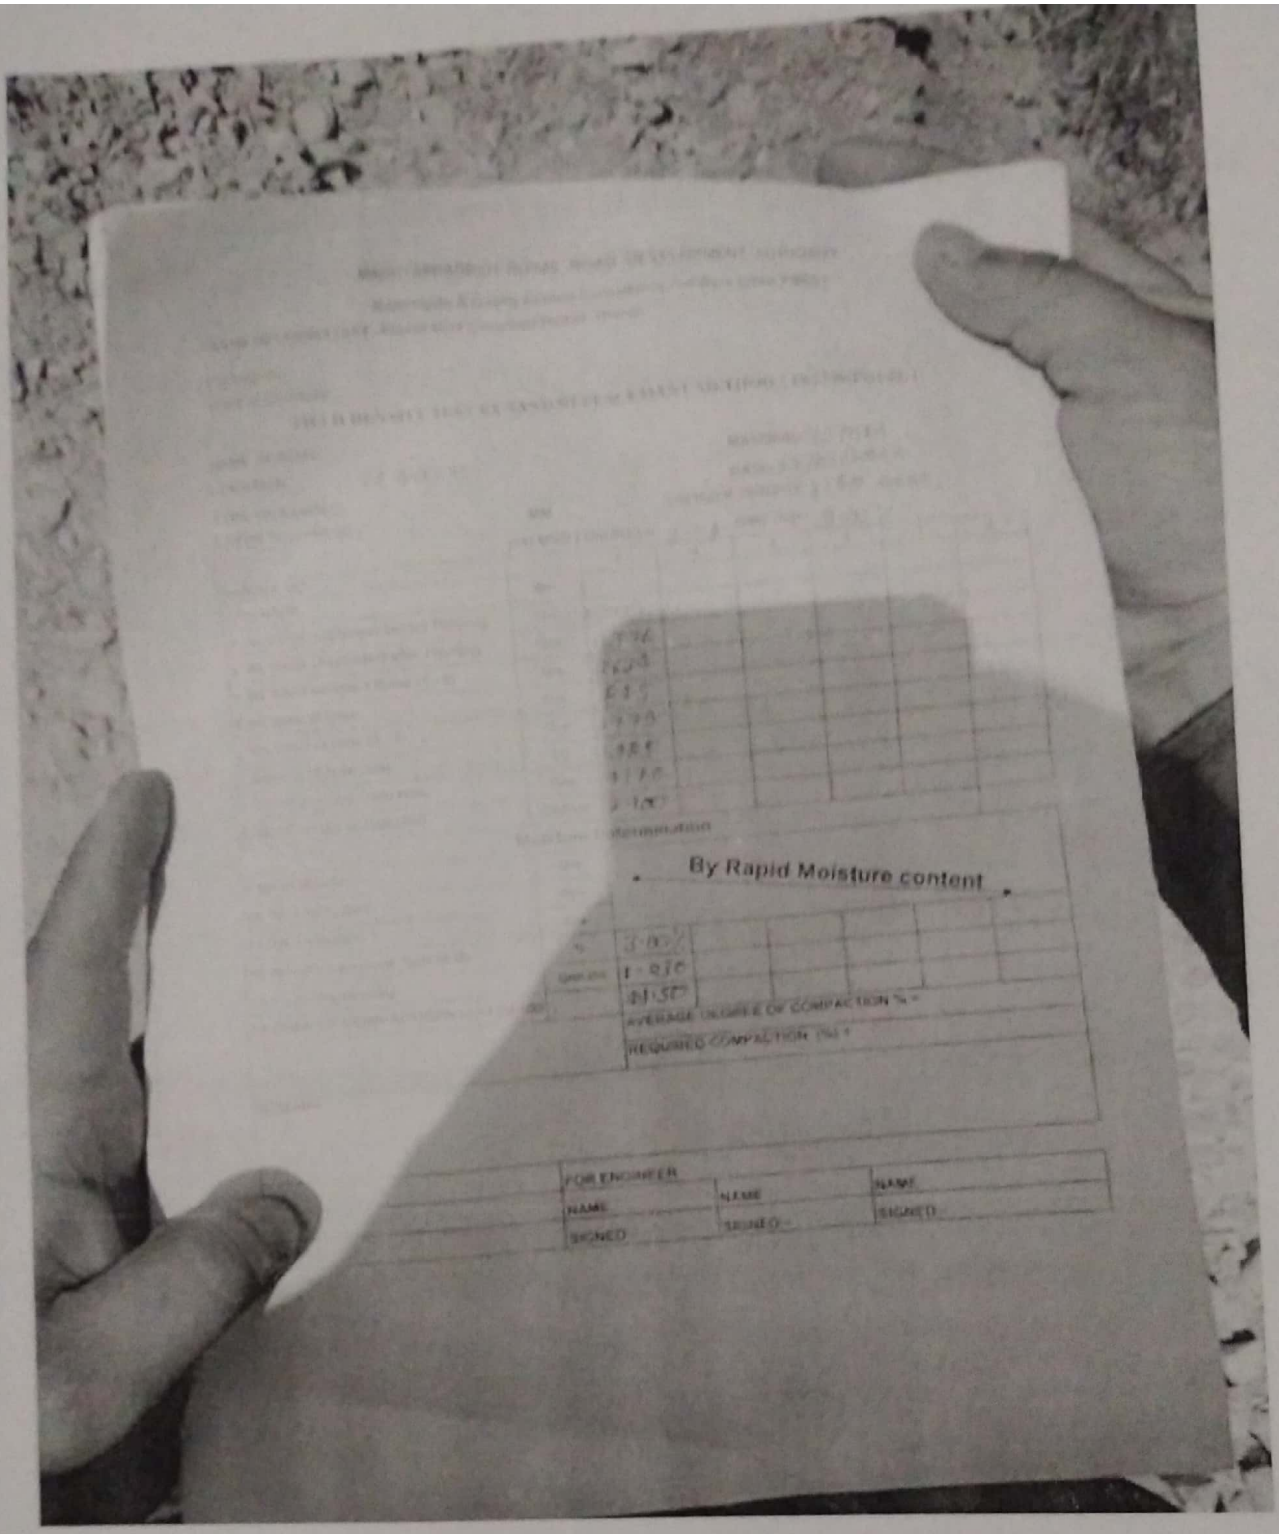

Scanned with CamScanner

Compressive strength test of concrete—

The compression strength of concrete cylindrical specimens is used to estimate their hardness.

The cylindrical specimen has a diameter of 150mm and a peak of 300mm.

procedure—

1. A concrete cylinder is casted to the same length as before and left to cure for 28 days. For the testing, three identical specimens are fabricated.

2. Remove the cylindrical specimen from the curing tank and set it aside.

three. Wipe the excess water from the floor of the cylindrical specimen

four. position the cylindrical specimen upright on the compression testing system's surface. The use of pad covers at the ends of the cylinders facilitates uniform load distribution and usefulness.

5. Make sure the loading floor touches the top of the cylinder specimen before starting to apply the weight.

6. At a pace of 315 kN/min, practise the weight consistently and uniformly without a shock. And keep adding the cylindrical specimen until it breaks.

7. Keep track of the machine's most recent load.

8. For the final two cylindrical specimens, the test is repeated.

Scanned with CamScanner





Scanned with CamScanner

Bituminous Extraction test –

Aim of the Test

To To decide the binder content (bitumen) within the asphalt mix via cold solvent extraction approach.

procedure of check

1. Take 500 grams of the consultant pattern and region inside the bowl of the extraction equipment w.

2. add benzene into the initial till it's far fully submerg.

three. Weigh the filter paper and place it in the bowl of the extraction apparatus containing sample B.

four. Clamp the bowl quilt.

5. Place a beaker beneath the drainpipe to catch the liquid.

6. A suitable amount of time (no more than 1 hour) is provided for the solvent to break down the material before operating the centrifuge.

7. Increase the speed of the centrifuge gradually until it reaches 3600 rpm.

8. Continue at the same pace until the solvent no longer wafts from the drainpipe.

9. Run the centrifuge until all of the bitumen and benzene has been drained out.

Scanned with CamScanner

10. prevent the device and put off cowl and add 200ml of benzene to cloth within the extraction bowl and the extraction is finished within the comparable process described as above.

eleven. Again once more equal system not less than 3 instances till the extraction is clear and not darker than a light straw shade.

12. Collect the material from the extraction device's bowl, as well as the filter out paper, and dry it to a constant weight in the oven at 1050°C to 1100°C, then cool to room temperature

thirteen. measure weight of the material (W2) and the clear out paper (D) one at a time to an accuracy of 0.01grams.

Scanned with CamScanner

Analysis of rates—

GENARAL—

quotes for one-of-a-kind object of works of the project has been taken from the "agenda of charges 05/11/2019 for street works, Culvert works & Carriage etc, MPRRDA.The fees of numerous objects were labored out which include all the labour expenses, lease expenses of equipment and plant life, Machines and all of the another price estimat of the labour's object, overhead and contractor's earnings @ 12.5% , 1% on those.

simple rate OF fabric—

The fundamental prices for riverbed and stonematerials has been taken

For bituminous substances, primary charge at (region) for equivalent viscosity grade bitumen and for eemulsion the primary fee of (region) have been considered as suggested.

simple price of other materials like corse and best sand, cement as in keeping with the brand new from

simple charge of steel material at subb-divisional workplace is considered for analysis afterincluding fee of carriage, loading & unloading.

DIRECTION FOR THE CLOTH—


For stone mixture and sand, the distance from supply to work site is calculated using the district local map and block level map of the core community, and the precise distance is determined after consulting with the PIU. The road serves as a means of transporting various goods to the jobsite.

SOR is used to get lead for bituminous and metal products.

Scanned with CamScanner

Working on site—



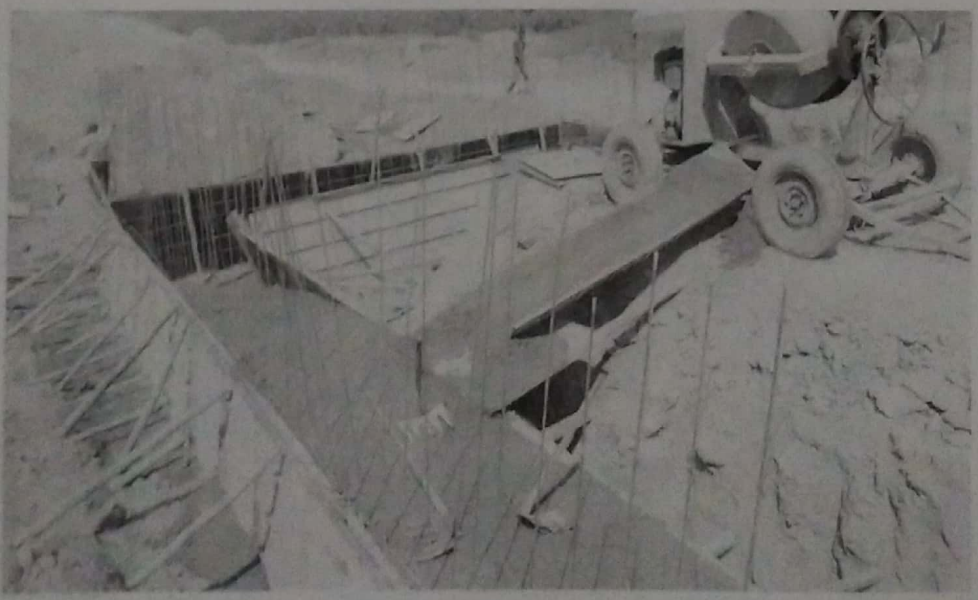

Scanned with CamScanner

Conclusion—

Roads can bring about all-round development in every area. a great road allows within the success of all the development activities. it's far inside the sphere of movement of populace and goods, agriculture, commerce, schooling, fitness,social welfare, or maybe upkeep of law and order and securities.

In this internship,our assigned road was ab road to ambah which has the length of 24.900 km in which we have learn and done various types of test and also learnt about how a rural road is construted and how it is maintained.we have also learnt about what is the problems occurs in the construction site.We have also gone to site inspection with Chief general manager where they also provides a lot of knowledge.

Scanned with CamScanner

Reference—

Pradhan Mantri Gram Sadak Yojna: Most Important Topic for ...

https://www.examrace.com/Study-Material/General-Studies/Policies-and-Programs/Pradhan-Mantri-Gram-Sadak-Yojna.htm

DPR Template | PDF | Road | Traffic - Scribd

https://www.scribd.com/document/458058269/DPR-Template

Scanned with CamScanner

MADHAV INSTITUTE OF TECHNOLOGY & SCIENCE, GWALIOR – 474005
(a Govt. Aided UGC Autonomous & NAAC Accredited Institute Affiliated to R.G.P.V. Bhopal)

Civil Engineering Department

Plagiarism Check Certificate

This is to certify that we are students of B.Tech in Civil Engineering have checked my complete Internship entitled "Road Construction and upgradation" for similarity/plagiarism using the "Turnitin software" available in the institute.

This is to certify that,

- The similarity in my internship report is found to be 10% (which is within the specified limit of 20%)

The full plagiarism report along with the summary is enclosed.

Student name: Aryan khan
Roll No.: 0901CE181027

30/SP022

Guide name: Dr. Hemant shrivastava
Designation: Assistant professor
Civil Engineering Department

HEAD
Civil Engg. Deptt.
M.I.T.S. Gwalior

Professor & Head of
for Civil Engg. Deptt.

(Turnitin Administrator)

Scanned with CamScanner

turnitin

Similarity Report ID: oid:28506:17942840

PAPER NAME

InternshipReport_AryanKhan.docx

WORD COUNT

2777 Words

CHARACTER COUNT

15092 Characters

PAGE COUNT

29 Pages

FILE SIZE

9.8MB

SUBMISSION DATE

May 31, 2022 10:00 AM GMT+5:30

REPORT DATE

May 31, 2022 10:01 AM GMT+5:30

10% Overall Similarity

The combined total of all matches, including overlapping sources, for each database.

- 2% Internet database
- 0% Publications database
- Crossref database
- Crossref Posted Content database
- 10% Submitted Works database

Excluded from Similarity Report

- Bibliographic material
- Quoted material

31/5/22

Summary

Scanned with CamScanner

turnitin

Similarity Report ID: oid:28506:17942840

10% Overall Similarity

Top sources found in the following databases:

- 2% Internet database
- Crossref database
- 10% Submitted Works database
- 0% Publications database
- Crossref Posted Content database

TOP SOURCES

The sources with the highest number of matches within the submission. Overlapping sources will not be displayed.

1	Madhav Institute of Technology & Science on 2019-05-02 Submitted works	2%
2	Madhav Institute of Technology & Science on 2019-03-23 Submitted works	1%
3	University of Malaya on 2021-11-12 Submitted works	1%
4	Asia Pacific International College on 2021-08-08 Submitted works	<1%
5	Madhav Institute of Technology & Science on 2019-04-16 Submitted works	<1%
6	Nottingham Trent University on 2020-05-08 Submitted works	<1%
7	Al Ain University on 2021-04-25 Submitted works	<1%
8	Middle East College of Information Technology on 2022-01-02 Submitted works	<1%

Sources overview

Scanned with CamScanner

9	drttit.gvet.edu.in Internet	<1%
10	Madhav Institute of Technology & Science on 2019-03-23 Submitted works	<1%
11	Madhav Institute of Technology & Science on 2019-02-19 Submitted works	<1%

Scanned with CamScanner

FORMAT

FORTNIGHTLY PROGRESS REPORT (FPR) FROM INDUSTRY MENTOR

Name of student	Aryan khan		Department	Civil Engg.	
Industry/Organization	MPRRDA, Morena		Date/Duration	DD/MM/YR -DD/MM/YR 17/01/22 - 31/01/22	
Criterion	**Poor**	**Average**	**Good**	**Very Good**	**Excellent**
Punctuality/Timely completion of assigned work		✓			
Learning capacity/Knowledge up gradation			✓		
Performance/Quality of work				✓	
Behaviour/Discipline/Team work				✓	
Sincerity/Hard work			✓		
Comment on nature of work done/Area/Topic	Test conducted on ~~roa~~ road ~~of~~ at construction time (Bitumen extractor)				
OVERALL GRADE (Any one)	**POOR/AVERAGE/GOOD/VERY GOOD/EXCELLENT**				
Name of Industry Mentor	Ajay Pratap Singh Tomar AM				
Signature of Industry Mentor	13/1/22				

ASSISTANT MANAGER
M.P.R.R.D.A.
P.I.U., Morena

Receiving Date	30/5/22	**Name of Faculty Mentor**	Dr. Ramant Shrivastava	**Sign**	

Scanned with CamScanner

FORMAT

FORTNIGHTLY PROGRESS REPORT (FPR) FROM INDUSTRY MENTOR

Name of student	Aryan khan		Department	Civil Engg.	
Industry/Organization	M.P.RRDA, Morena		Date/Duration	DD/MM/YR -DD/MM/YR 01/02/22-15/02/22	
Criterion	**Poor**	**Average**	**Good**	**Very Good**	**Excellent**
Punctuality/Timely completion of assigned work			✓		
Learning capacity/Knowledge up gradation				✓	
Performance/Quality of work			✓		
Behaviour/Discipline/Team work				✓	
Sincerity/Hard work			✓		
Comment on nature of work done/Area/Topic	Measurement of Crest Surface, Thickness by using Gauge				
OVERALL GRADE (Any one)	**POOR/AVERAGE/GOOD/VERY GOOD/EXCELLENT**				
Name of Industry Mentor	Ajay Pratap Singh Tomar AM				
Signature of Industry Mentor	13/4/22				

ASSISTANT MANAGER
M.P.R.R.D.A.
R.I.U., Morena

Receiving Date	30/5/22	**Name of Faculty Mentor**	Dr Hemant Shrivastava	**Sign**	

Scanned with CamScanner

FORMAT

FORTNIGHTLY PROGRESS REPORT (FPR) FROM INDUSTRY MENTOR

Name of student	Aryan khan		Department	Civil Engg.	
Industry/Organization	M.P.RRDA, Morena		Date/Duration	DD/MM/YR -DD/MM/YR 16/02/22 - 28/02/22	
Criterion	**Poor**	**Average**	**Good**	**Very Good**	**Excellent**
Punctuality/Timely completion of assigned work		✓			
Learning capacity/Knowledge up gradation			✓		
Performance/Quality of work				✓	
Behaviour/Discipline/Team work				✓	
Sincerity/Hard work			✓		
Comment on nature of work done/Area/Topic	Verify the Sideslope of Road and width of road and check the Superelevation. ✓				
OVERALL GRADE (Any one)	**POOR/AVERAGE/GOOD/VERY GOOD/EXCELLENT**				
Name of Industry Mentor	Ajay Pratap Singh Tatar AM				
Signature of Industry Mentor	15/4/22 AM ASSISTANT MANAGER M.P.R.R.D.A. P.I.U., Morena				

Receiving Date	30/5/2022	**Name of Faculty Mentor**	Dr. Hemant Srivastava	**Sign**	

Scanned with CamScanner

FORMAT

FORTNIGHTLY PROGRESS REPORT (FPR) FROM INDUSTRY MENTOR

Name of student	Aryan khan		Department	Civil Engg.	
Industry/Organization	MPRRDA, Morena		Date/Duration	DD/MM/YR -DD/MM/YR 01/03/22-15/03/22	
Criterion	**Poor**	**Average**	**Good**	**Very Good**	**Excellent**
Punctuality/Timely completion of assigned work			✓		
Learning capacity/Knowledge up gradation				✓	
Performance/Quality of work			✓		
Behaviour/Discipline/Team work				✓	
Sincerity/Hard work			✓		
Comment on nature of work done/Area/Topic	Inspection of Road (A.B. Road to Ambah Road via Mragpura, Palpura Ganjrampur) Under the Guidance of G.M (Genera Manager) and C.G.M (Chief General Manager)				
OVERALL GRADE (Any one)	**POOR/AVERAGE/GOOD/VERY GOOD/EXCELLENT**				
Name of Industry Mentor	Ajay Pratap Singh Tomar AIM				
Signature of Industry Mentor	ASSISTANT MANAGER M.P.R.R.D.A. P.I.U., Morena				

Receiving Date	30/5/22	**Name of Faculty Mentor**	Dr Hemant Srivastava	**Sign**	

Scanned with CamScanner

FORMAT

FORTNIGHTLY PROGRESS REPORT (FPR) FROM INDUSTRY MENTOR

Name of student	Aryan khan		Department	Civil Engg.	
Industry/Organization	MPRRDA, Morena		Date/Duration	DD/MM/YR -DD/MM/YR 16/03/22 - 31/03/22	
Criterion	**Poor**	**Average**	**Good**	**Very Good**	**Excellent**
Punctuality/Timely completion of assigned work			✓		
Learning capacity/Knowledge up gradation				✓	
Performance/Quality of work			✓		
Behaviour/Discipline/Team work				✓	
Sincerity/Hard work			✓		
Comment on nature of work done/Area/Topic	Visit the Maintenance site for Inspection of Measurement of thickness, coidth of Road material Quality check of Road Material (i.e. Bituminus, Aggergate)				
OVERALL GRADE (Any one)	**POOR/AVERAGE/GOOD/VERY GOOD/EXCELLENT**				
Name of Industry Mentor	Ajay Pratap Singh Tomar Ajay				
Signature of Industry Mentor	13/4/22 ASSISTANT MANAGER M.P.R.R.D.A. P.I.U., Morena				

Receiving Date	30/5/22	**Name of Faculty Mentor**	Dr Hemant Srivastava	**Sign**	Hemant

Scanned with CamScanner

FORMAT

FORTNIGHTLY PROGRESS REPORT (FPR) FROM INDUSTRY MENTOR

Name of student	Aryan khan		Department	Civil Engg.	
Industry/Organization	MPRRDA, Morena		Date/Duration	01/04/22 - 15/04/22	
Criterion	**Poor**	**Average**	**Good**	**Very Good**	**Excellent**
Punctuality/Timely completion of assigned work		✓			
Learning capacity/Knowledge up gradation			✓		
Performance/Quality of work			✓		
Behaviour/Discipline/Team work			✓		
Sincerity/Hard work			✓		
Comment on nature of work done/Area/Topic	Done field density test using sand replacement method on field.				
OVERALL GRADE (Any one)	**POOR/AVERAGE/GOOD/VERY GOOD/EXCELLENT**				
Name of Industry Mentor	A-P-S-Tomar Asst. manager				
Signature of Industry Mentor	ASSISTANT MANAGER M.P.R.R.D.A. P.I.U., Morena				

Receiving Date	30/5/22	Name of Faculty Mentor	Dr Hemant Srivastava	Sign	

Scanned with CamScanner

FORMAT

FORTNIGHTLY PROGRESS REPORT (FPR) FROM INDUSTRY MENTOR

Name of student	Aayan khan		Department	Civil Engg.	
Industry/Organization	MPRRDA, Morena		Date/Duration	16/04/22 - 30/4/22	
Criterion	**Poor**	**Average**	**Good**	**Very Good**	**Excellent**
Punctuality/Timely completion of assigned work		✓			
Learning capacity/Knowledge up gradation			✓		
Performance/Quality of work			✓		
Behaviour/Discipline/Team work			✓		
Sincerity/Hard work			✓		
Comment on nature of work done/Area/Topic	Perform a compressive strength test on specimen drive from the Road construction site. (In RRDA lab)				
OVERALL GRADE (Any one)	**POOR/AVERAGE/GOOD/VERY GOOD/EXCELLENT**				
Name of Industry Mentor	A.P.S. Tomar Asst. manager				
Signature of Industry Mentor	ASSISTANT MANAGER M.P.R.R.D.A. P.I.U., Morena				

Receiving Date	3/5/22	**Name of Faculty Mentor**	Brijendra Shrivastava	**Sign**	

Scanned with CamScanner

FORMAT

FORTNIGHTLY PROGRESS REPORT (FPR) FROM INDUSTRY MENTOR

Name of student	Aryan khan		Department	Civil Engg.	
Industry/Organization	MPRRDA, Morena		Date/Duration	01/05/22 - 20/5/22 ~~15/6/22 - 30/6/22~~	
Criterion	**Poor**	**Average**	**Good**	**Very Good**	**Excellent**
Punctuality/Timely completion of assigned work			✓		
Learning capacity/Knowledge up gradation			✓		
Performance/Quality of work		✓			
Behaviour/Discipline/Team work			✓		
Sincerity/Hard work		✓			
Comment on nature of work done/Area/Topic	Understand the process of final payment b/w contractor & department.				
OVERALL GRADE (Any one)	**POOR/AVERAGE/GOOD/VERY GOOD/EXCELLENT**				
Name of Industry Mentor	A.P.S. Tomar Asst. manager P.I.U. Morena.				
Signature of Industry Mentor	ASSISTANT MANAGER M.P.R.R.D.A. P.I.U., Morena				

Receiving Date	30/8/22	**Name of Faculty Mentor**	Dr Hemant Shrivastava	**Sign**	

Scanned with CamScanner